

SedCatch® Sediment Basket™ - Combination Grate & Curb Inlet


LEGEND

SB	SEDIMENT BASKET™
----	------------------

SIZING INSTRUCTIONS:

MEASURE THE ACTUAL SIZE OF THE GRATE; CHECK FOR ANY OBSTRUCTIONS THAT COULD INTERFERE WITH THE SEDCATCH® SEDIMENT BASKET.™

* DETERMINES UNIT SIZE.

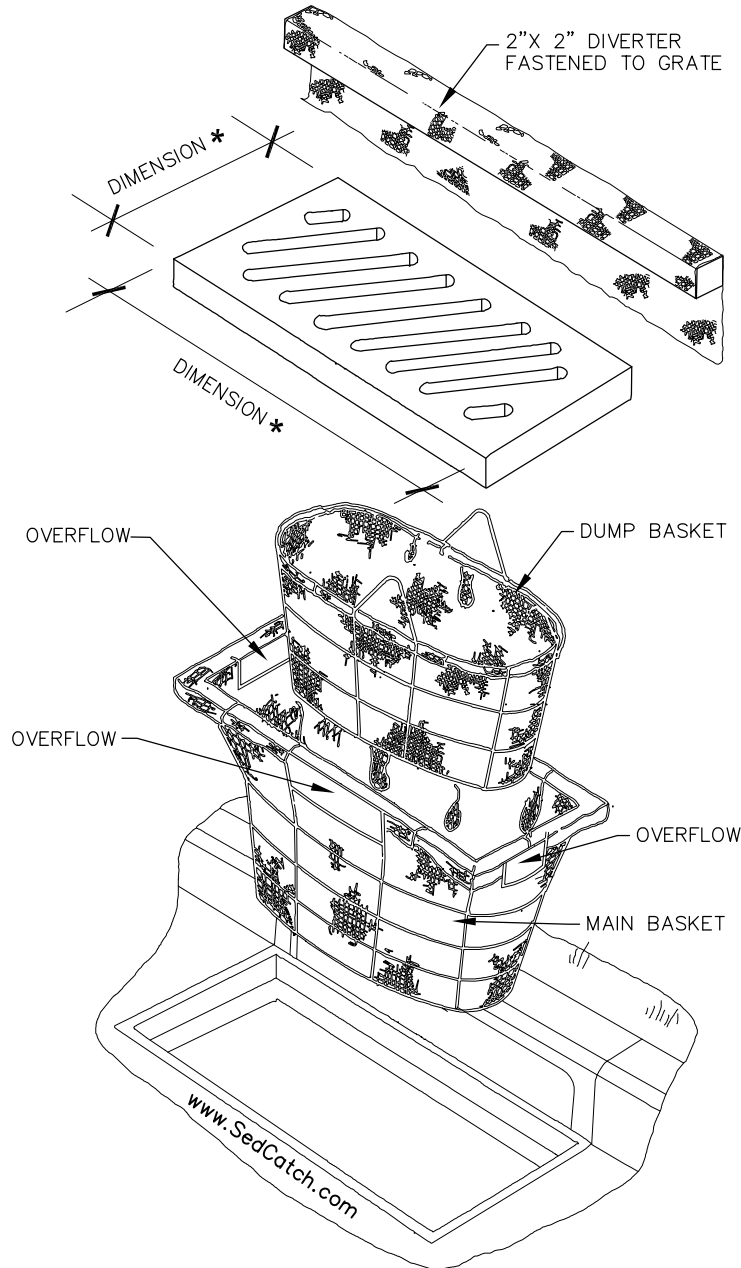

SedCatch® Environmental Products

US PATENTS D 598,196, D 600,324, D 604,800, OTHER PATENTS PENDING

www.SedCatch.com

1. SEDIMENT BASKET SHOULD BE INSTALLED AT THE TIME THE STRUCTURE IS SET.
2. TO INSTALL: REMOVE GRATE, ATTACH DIVERTER TO THE BACK OF THE GRATE, DROP MAIN SEDIMENT BASKET IN OPENING, PLACE DUMP BASKET IN MAIN BASKET, SLIDE GRATE BACK OVER OPENING.
3. INSPECT AFTER EACH RAIN OR AS DIRECTED BY ENGINEER OR INSPECTOR.
4. IF THERE IS AN ACCUMULATION OF SEDIMENT; SLIDE THE GRATE OFF THE INLET, LIFT THE DUMP BASKET OUT OF THE MAIN BASKET, EMPTY CONTENTS IN A SUITABLE LOCATION, REPLACE THE DUMP BASKET, REPLACE GRATE.
5. AFTER APPROXIMATELY 10-20 DUMPS, OR AS NEEDED, EMPTY THE MAIN BASKET OF ANY ACCUMULATED SEDIMENT.
6. AS WITH ALL INLET PROTECTION DEVICES, CHECK TO SEE HOW DEEP THE WATER COULD RISE IF THE INLET WERE BLOCKED ENTIRELY. DO NOT INSTALL IF IT COULD CAUSE PROPERTY DAMAGE OR POSE A SAFETY HAZARD TO TRAFFIC.